
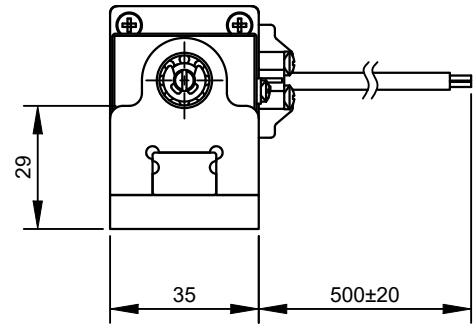


REV.	REVISION RECORD	BY	DATE
0	ORIGIN	YSX	4.13.2026

CUSTOMER'S MODEL: NO MODEL  
 END COVER COLOR: BLACK

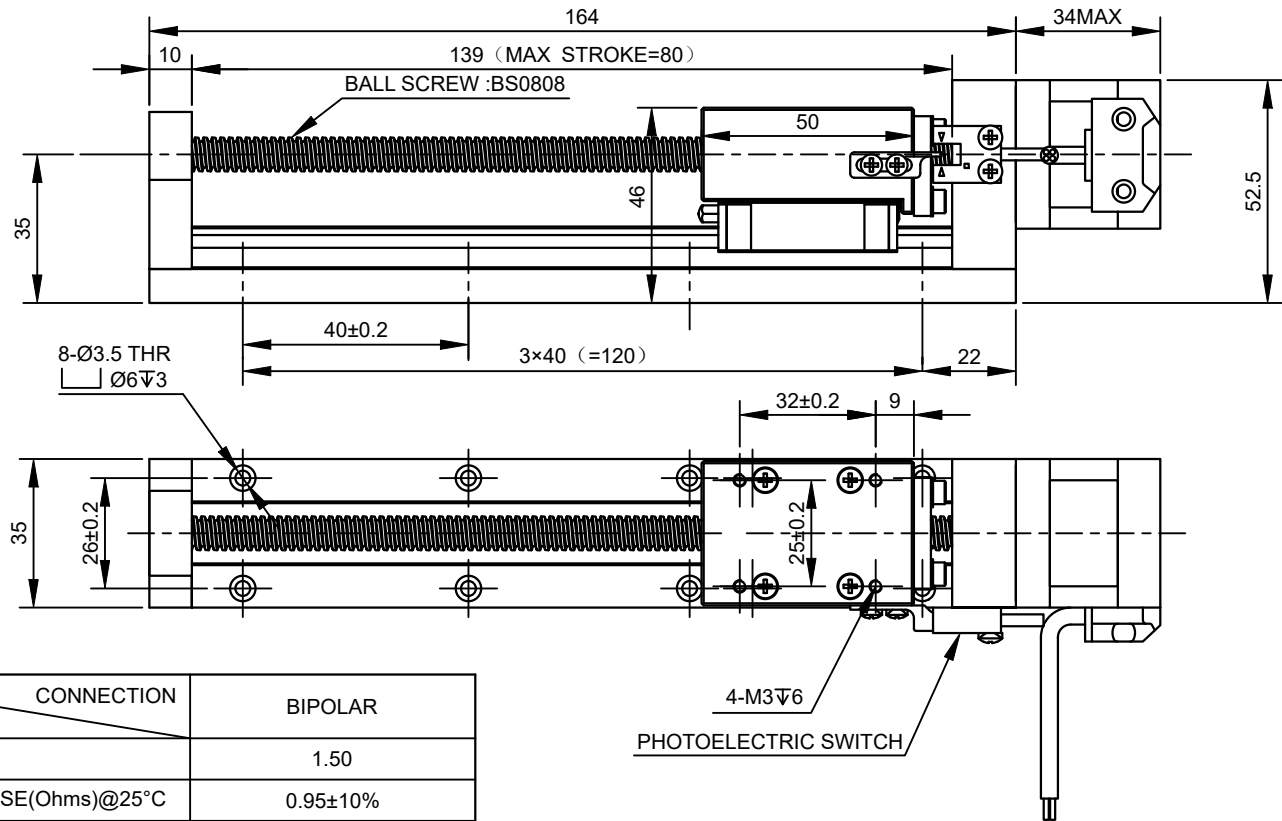

PHOTOELECTRIC SWITCH SEQUENCE		
PIN NO	BIPOLAR	LEADS
1	+5~24V	BRN
2	GND	BLU
3	SIGNAL LINE	BLK
4	N/A	WHT

MOTOR CONNECTION			
PIN NO	BIPOLAR	LEADS	WINDING
1	A+	RED	
2	A-	RED/WHT	
3	B+	GRN	
4	B-	GRN/WHT	

SPECIFICATION	CONNECTION	BIPOLAR
AMPS/PHASE		1.50
RESISTANCE/PHASE(Ohms)@25°C		0.95±10%
INDUCTANCE/PHASE(mH)@1KHz		1.40±20%
HOLDING TORQUE(Nm)[lb-in]		0.14[1.23]
MAXIMUM THRUST(N)		135
STEP ANGLE(°)		1.80
STEP ACCURACY(NON-ACCUM)		±5.00%
LEAD(mm)[in]		8[0.3144]
LINEAR TRAVEL/STEP(mm)[in]		0.04[0.001572]
RATED LOAD CAPACITY(N)		115
MAX SPEED(mm/s)		160
POSITION ACCURACY(mm)		±0.02
AMBIENT TEMPERATURE		-20°C~50°C[-4°F~122°F]
INSULATION CLASS		B 130°C[266°F]
TEMPERATURE RISE		MAX.80°C

COMMENT:  
 1.TMBF 6000h OR MORE @ 24V/300RPM  
 2.INSULATION RESISTANCE (NORMAL TEMPERATURE AND HUMIDITY): 100 Mohm  
 3.DIELECTRIC STRENGTH 500VAC FOR 1MIN. (BETWEEN THE MOTOR COILS AND THE MOTOR CASE )

FULL STEP 2 PHASE-Ex.,WHEN FACING MOUNTING END (X)						DIMENSIONS ARE IN MILLIMETERS. TOLERANCES AS BELOW:	
STEP	A+	B+	A-	B-	CCW	CW	ANGLES
1	+	+	-	-			DECIMALS
2	-	+	+	X ±0.5			
3	-	-	+	X.X ±0.25			
4	+	-	-	X.XX ±0.13			
							THIRD ANGLE PROJECTION

**STEPPERONLINE®**

**LINEAR ACTUATORS**

**LMD14S13BMB15-080**

REV.	0	SCALE	1:1	DWG NO.	A6506
------	---	-------	-----	---------	-------

SIGNATURE		DATE
DRN	YSX	4.13.2026
APVD	LDJ	4.15.2026